

Explosion Proof Peristaltic Pump

Model No.: ExD-600-6L/DZ25-6L

Flow Rate: 0.3-6000mL/min




Product Introduction

- A new category of peristaltic pump based on explosion proof standards.
- The whole pump is explosion proof, reaching  II2G Ex db IIC T4 Gb and  II2D Ex tb IIIC T130°C Db explosion proof levels at the same time.
- Intelligent control system to realize high precision transferring and dispensing.

Product Features

1. Integrated casting body .
2. IP66 designed for industrial environment.
3. Three-proof buttons and knob system: explosion-proof dustproof, waterproof.
4. Intelligent operation system.
5. Passed EMC test excellent anti-electromagnetic interference capability.
6. AC servo motor control system.
7. Laser engraving logo pattern to eliminate the hidden danger of static electricity of traditional plastic label.

Main Interface

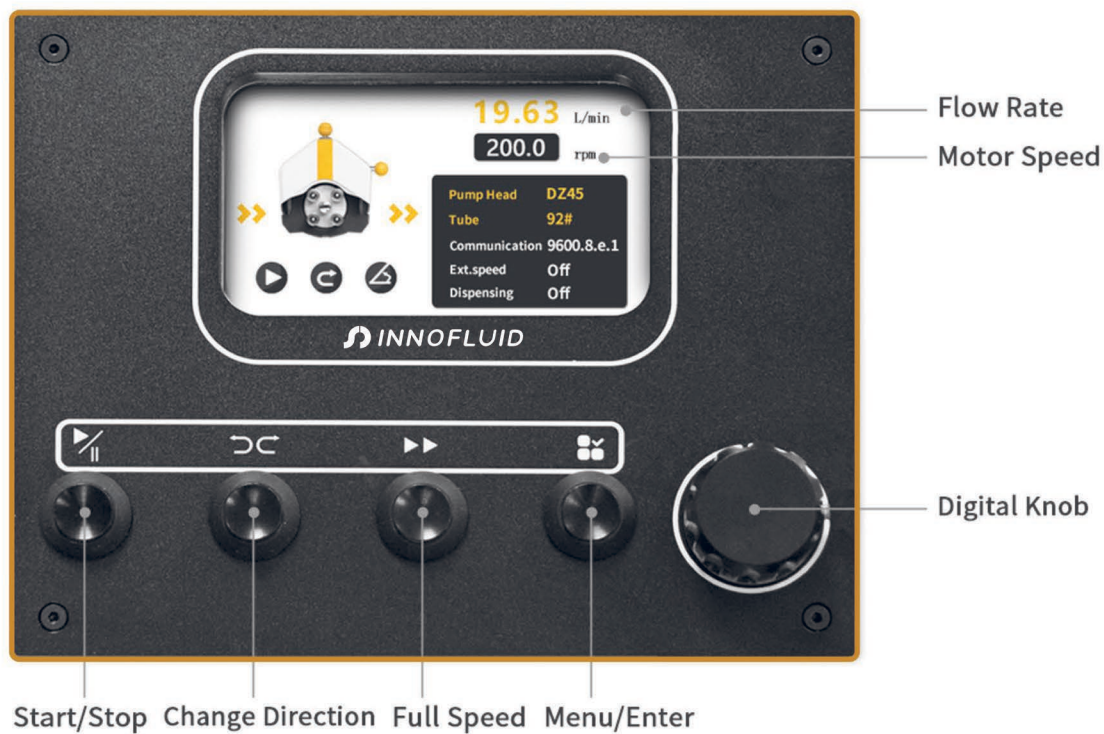

Pump Head




DZ25-6L

Flow Rate


DZ25-6L Flow Rate

Drive	Pump Head	Housing Material	Tube Clamp Material	Tubing		mL/r	Speed (rpm)	Flow Rate (mL/min)	Weight (kg)
				Size	IDxWall Thickness				
ExD-600-6L	DZ25-6L	Aluminum alloy	Polyamide	15#	4.8x2.4(mm)	3	0.1-600	0.3-1800	1.87
				24#	6.4x2.4(mm)	5.5		0.55-3300	
				35#	7.9x2.4(mm)	8		0.8-4800	
				36#	9.6x2.4(mm)	10		1-6000	

Flow Rate(0.1-600rpm)

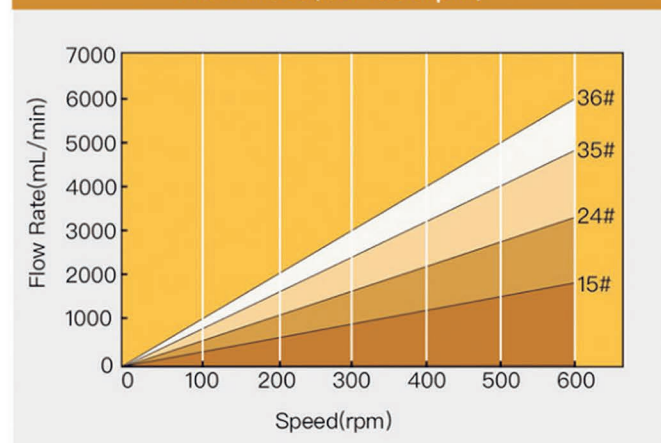

Pump Head Pressure/Flow Rate Curve(100rpm)

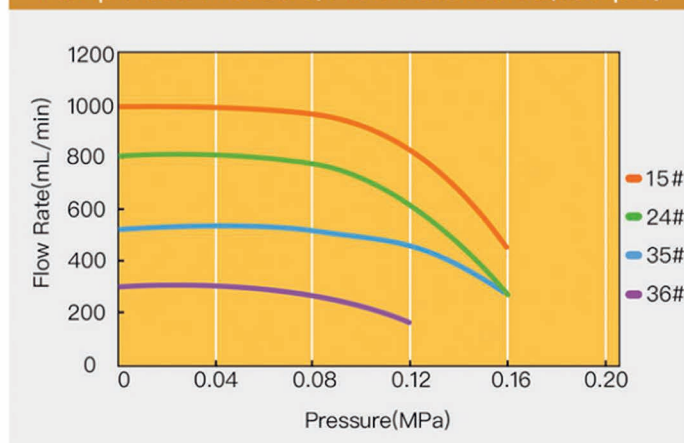

DZ25-6L Filling Volume Reference Parameter

Drive	Pump Head	Tubing	Filling Volume(mL)	Filling Time(s)	Accuracy($\pm\%$)	Output (pcs/min)	Motor Speed(rpm)
ExD-600-6L	DZ25-6L	15#	30	1.2	0.5	27	500.0
		24#	50	1.2	0.5	27	454.6
		35#	70	1.2	0.5	27	437.5
		36#	100	5	0.5	24	400.0

Experimental conditions: standard atmospheric pressure, room temperature at 20°C, the liquid is pure water, no pressure, no suction and lift.

Note: Actually, it is affected by many factors such as transmission medium, inlet and outlet pressure, hose material and error, working environment, etc. This data is for reference only.

Technical Specifications

Marking	 II2G Ex db IIC T4 Gb  II2D Ex tb IIIC T130°C
Standard	EN IEC 60079-0:2018+A11:2024; EN IEC 60079-1:2014+A11:2024; EN IEC 60079-31:2018
Housing material	Aluminum Alloy
Speed range	0.1-600rpm
Speed resolution	0.1rpm
Display	4.3 inch-Industrial grade-True color LCD screen
Control	Mechanical button, explosion proof knob, external control signal and communication
Working mode	Flow rate mode, Dispensing mode
Flow rate mode	Continuous transferring according to the set flow rate or motor speed
Dispensing mode	Set the dispensing volume, dispensing time, pause time and repeat numbers
Dispensing volume	0.1mL-9999L
Dispensing time	0.1sec-9999hour
Pause time	0.5sec-9999hour
Repeat number	1-9999 times, 0 represent unlimited
Calibration function	Input actual volume and calibrate automatically
Back suction angle	0-360°
Communication	RS485
Communication protocol	Modbus protocol(RTU mode)
External control speed signal	0-5V, 0-10V, 4-20mA optional
External control signal input	Active switch signal (5-24V) control start/stop, direction and full speed; Passive switch signal control start/stop.
External control signal output	Open collector output working status
Drive dimension (L×W×H)	458×285×335mm
Power supply	AC220V±10%, 50Hz
Rated power	300W
Relative humidity	<90%
Condition temperature	0-40°C
IP rate	IP66
Drive weight	30.1kg

Dimension Drawing(Unit:mm)

